



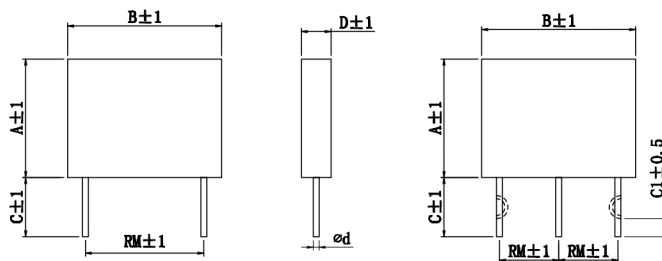

## RGC 型瓷壳低阻金属片电阻器 2W-10W

RGC Porcelain Housing Low Resistance Metal Wire Wound Resistors 2W-10W

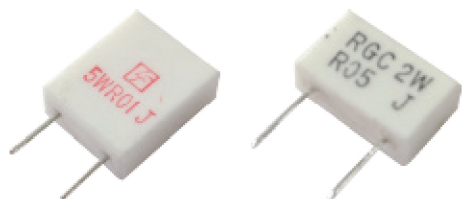

### 产品特点 Features

- 高温负荷特性优良  
Excellent high temperature load performance
- 可提供安装套件（选购件）  
Assembly and fittings (available)
- 高过载能力  
High over loading ability

### 应用范围 Applications

- 电力分配，负荷测试  
Electric power distribution, load test
- 用于电源等回路的限流、均流或取样检测  
Applied for current limited current balance or sampling for testing
- 适用于功率电源  
Ideal for functional power supply
- 变频电源等领域  
Inverter power supply etc

### 主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range		外形尺寸 Dimensions(mm)						
		最小值 Min	最大值 Max	A	B	C	C1	D	d	RM
RGC	2	R01	R68	8	13	10	-	5	0.6	9
	3	R01	R68	13	13	10	-	5	0.6	9
	5	R01	R68	18	14	10	-	5	0.6	10
	5	R01	R68	10	26	10	-	5	0.8	20
	7	R01	R68	18	26	10	-	5	0.8	20
	10	R01	R68	20	26	10	-	5	1.0	20
	10	R01	R68	19	26	10	-	5	1.0	20
	2+2	R1+R1	R33+R33	10	26	10/14/12	2.5/4/5	5	1.0	10
	3+3	R1+R1	R5+R5	18	26	10/14/12	2.5/4/5	5	1.0	10
	3+3	R1+R1	R5+R5	13	26	10/14/12	2.5/4/5	5	1.0	10
5+5	R1+R1	1R8+1R8	20	26	10/14/12	2.5/4/5	5	1.0	10	

### 订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RGC	3W	0R01	± 5%